




Installation Guide: Roman Blind-chain control.

Parts Included



Brackets



Screws



Child Safety Device
Qty: 1



Safety Screws
Qty: 2

Note: Please be aware that the mounting bracket quantity supplied will depend on the width of the blind. Please ensure that all brackets supplied are installed.

Important Notes

- Please check that all parts have been supplied before you begin to assemble your new Custom Roman Blind
- Do not raise/lower the blind until it is fully installed
- The finished blind width is from the outside of the left bracket to the outside of the right bracket
- Ensure that the blind is mounted level for correct operation

Positioning Blind

As per your order, determine the correct fitting location of mounting brackets and mark where you are going to install the brackets.

- Inside the window frame (Inside Mount) or;
- On the window frame or wall (Outside Mount)


Installing Mounting Brackets

Inside Mount

The Installation Brackets (part A) are fixed directly to the mounting surface, spaced evenly. Make sure all brackets are in a straight line so the headrail will attach easily.


Outside Mount

The Installation Brackets (part A) are mounted directly to the architrave or wall, spaced evenly. Make sure all brackets are level. The brackets should not be installed at the very end of the headrail.

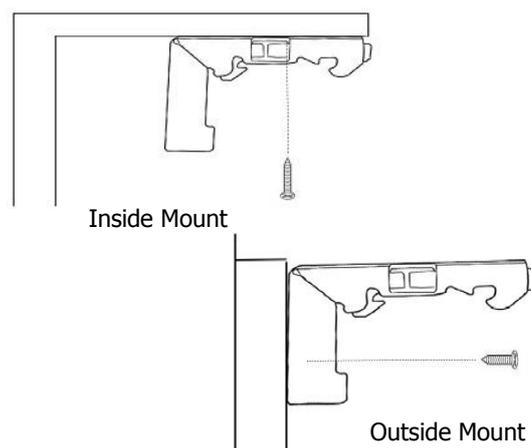

Attaching Blind to Bracket

Position the front edge of the headrail into the front hooks of the installation bracket and gently push upwards and the track will 'snap' into position. To remove the blind, press the release button on the front of the installation bracket (part A) and disengage headrail from brackets.

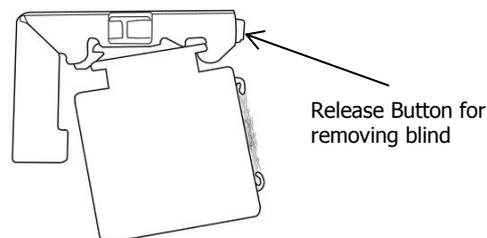

Operating Heavy Duty Roman Blind

To operate the blind successfully, raise and lower using the chain control. You must alternate the chains used to both raise and lower the blind. If the same chain is used to both raise and lower the blind, the blind will raise on an angle and may be damaged.

Attaching Child Safety Device (For more safety information, please see over page)

Secure the child safety device (part C) to the wall beside the blind, ensuring the chain is not too tight, as this may restrict smooth operation.

Note: Please allow approximately two weeks for the settling out process.

(Note these guides are designed for customer made blinds.)

If you have any further questions please contact Super Blinds Mart on 1300 652 027




Installation Guide: **Roman Blind Safety Information**

Child Safety Instructions

For Blinds With Chain Control

Warning

- The chain tension device must be fitted to ensure child safety
- The chain tension device is to be positioned at the bottom of the chain loop
- It can be fitted to the inside of the reveal (Frame) or in front of the reveal (Frame)



Child Safety Device

Fitting Instructions

1. Position the tension device at the bottom of the chain loop (Figure 1)
2. Install the tension device onto the reveal/frame, making sure that the loop chain hangs with minimal tension (Figure 2)

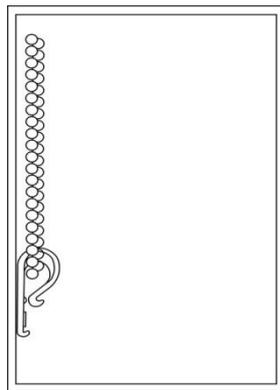


Figure 1

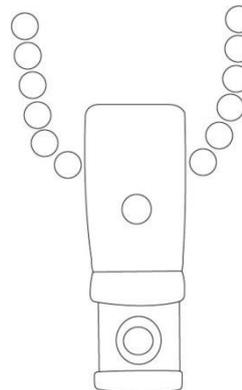


Figure 2



WARNING – ALL WINDOW COVERINGS WITH CORD OR CHAIN

To avoid creating a possible strangulation hazard for children, the corded or chained internal window covering must be installed in such a way that a loose cord or chain cannot form a loop 220mm or longer at a height of less than 1600mm above floor level.

- A cord/chain guide may be installed lower than 1600mm above floor level if the cord/chain is sufficiently secured or tensioned to prevent a loop 220mm or longer being formed
- If a cord/chain guide is installed lower than 1600mm above floor level, it must be designed to prevent a child from being able to remove the cord/chain
- If a cleat is used to secure the cord, it must be at least 1600mm above floor level because a child is capable of unwinding a cord from a cleat

(Note these guides are designed for customer made blinds.)

If you have any further questions please contact Super Blinds Mart on 1300 652 027